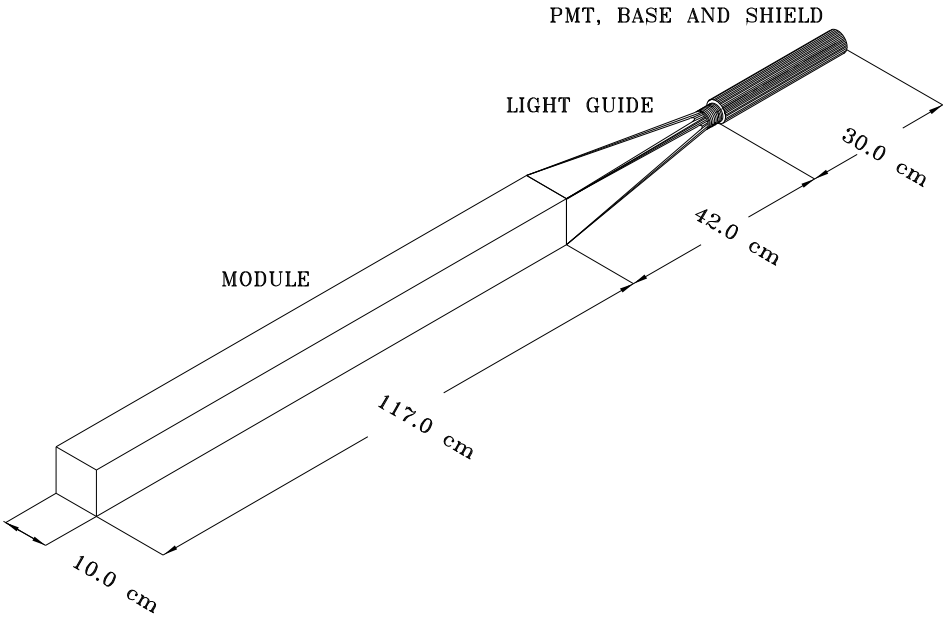

Fig. 3. Calorimeter Tower Layout. Scintillating fibers are imbedded longitudinally in a lead substrate. The light readout proceeds through a tapered lucite light guide with a single photo-multiplier tube per tower.